


## INSTALLATION INSTRUCTIONS

### Yamaha Grizzly 700, 2" Lift Kit

Item	Description	Qty
A	Front Lift Bracket	1
B	Front Lift Tabs	2
C	Rear Lift Tabs	2
D	Rear Lift Bracket	1
E	Spacers	4
F	M10 Flat Washers	8
G	M10-1.50 x 55mm Lg. HHCS	8
H	M10-1.50 Nylock Nuts	8

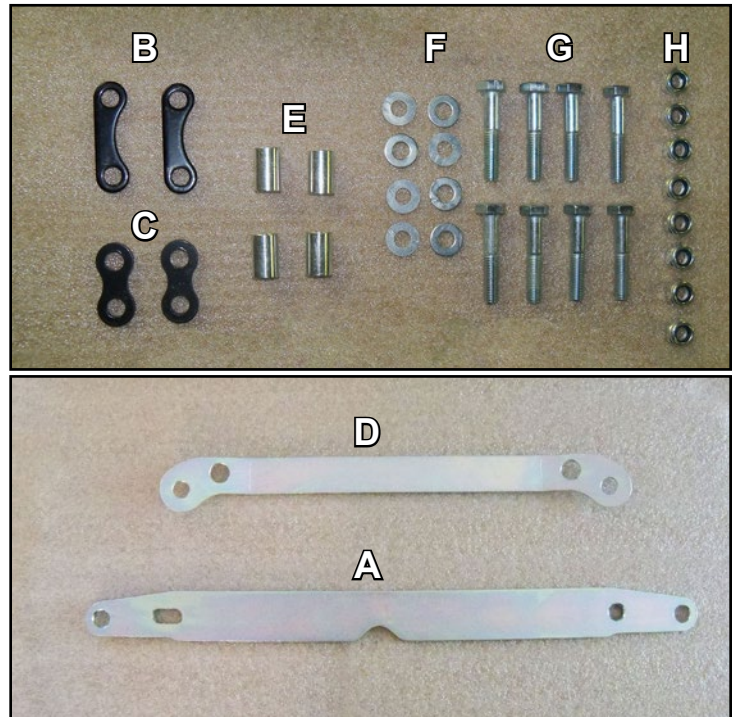

**Read instructions and view illustrations before beginning.**

**Need help with your installation?**



sales@superatv.com



www.superatv.com



1-812-574-7777



8:00am - 9:00pm EST M-Th  
8:00am - 7:00pm EST Friday  
9:00am - 2:00pm EST Saturday

*Thank You  
For Choosing*

#### Liability Statement

SuperATV's products are designed to best fit users ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory, or aftermarket, parts will void any warranty provided by SuperATV and is not recommended. SuperATV's products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV to verify that they will work together.

Although SuperATV has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV urges operators and occupants to wear a helmet and appropriate riding gear at all times.



By purchasing and installing SuperATV products, user agrees that should damages occur, SuperATV will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV will warranty only parts provided by SuperATV. Any damage or problems with OEM housings, bearings, seals, or other manufacturers products will not be covered by SuperATV. SuperATV parts and products are not warranted if item was not installed properly, misused, or modified.

*Do not tighten hardware completely unless noted.*

## FRONT

1. Raise front of machine and secure with jack stands. Remove front Wheels.
2. Remove top bolt from shock.
3. Install Front Lift Bracket (A) to outside of factory mounting bracket. See Fig. 1 and Fig. 1a.
4. Front Lift Tabs (B) install to inside of factory mounting bracket. Secure using (1) M10-1.50 x 55mm Lg. HHCS (G), (1) M10 Flat Washer (F), (1) Spacer (E), and (1) M10 Nylock Nut (H). Repeat for opposite side. See Fig. 1 and Fig. 1a.
5. Reinstall Shocks into new Lift Brackets and secure using (1) M10-1.50 x 55mm Lg. HHCS (G), (1) M10 Flat Washer (F), and (1) M10 Nylock Nut (H). See Fig. 1 and Fig. 1a.
6. Tighten hardware completely and reinstall wheels.

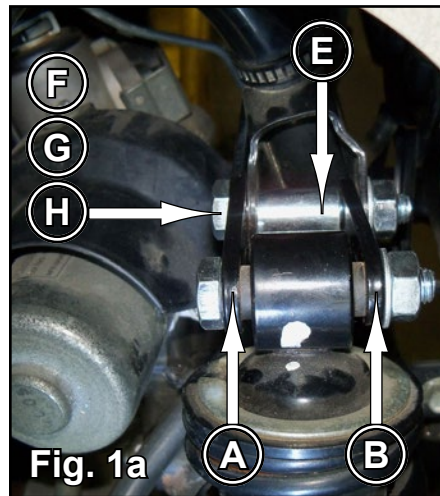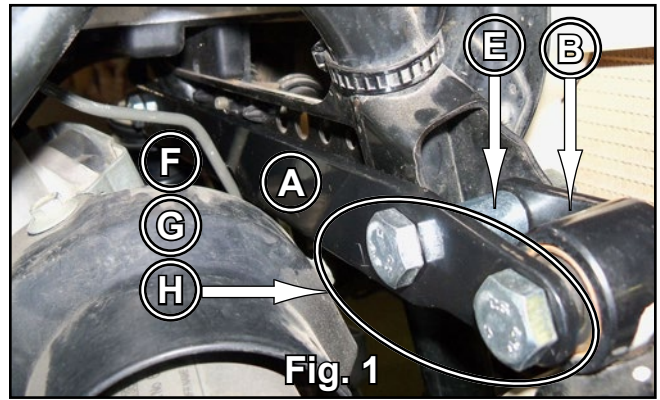

## REAR

1. Raise rear of machine and secure with jack stands. Remove rear Wheels.
2. Remove top bolt from shock. *Hint: Loosening bottom bolt will help when reinstalling shocks.*
3. Install Rear Lift Bracket (D) to outside of factory mounting bracket. See Fig. 3 and Fig. 3a.
4. Rear Lift Tabs (C) install to inside of factory mounting bracket. Secure using (1) M10-1.50 x 55mm Lg. HHCS (G), (1) M10 Flat Washer (F), (1) Spacer (E), and (1) M10 Nylock Nut (H). Repeat for opposite side. See Fig. 3 and Fig. 3a.
5. Reinstall Shocks into new Lift Brackets and secure using (1) M10-1.50 x 55mm Lg. HHCS (G), (1) M10 Flat Washer (F), and (1) M10 Nylock Nut (H). See Fig. 3 and Fig. 3a.
6. Tighten hardware completely and reinstall wheels.

