
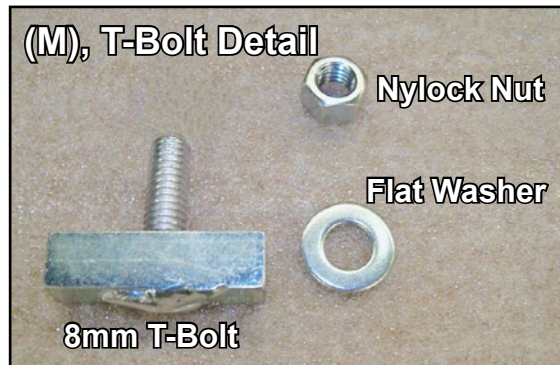
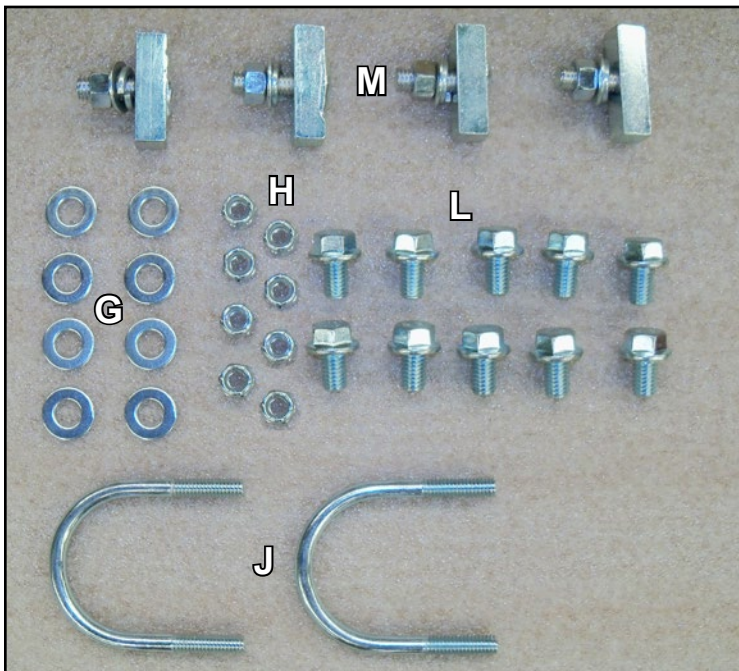


INSTALLATION INSTRUCTIONS

Polaris RZRXP 900 Nerf Bars

Item	Description	Qty
A	Mounting Bracket, Right	1
B	Mounting Bracket, Left	1
C	Center Bracket, Right	1
D	Center Bracket, Left	1
E	Nerf Bar, Right	1
F	Nerf Bar, Left	1
G	M8 Flat Washers	8
H	M8 Nylock Nuts	8
J	M8 U-Bolts	2
L	M10 Flanged Head Bolts	10
M	M8 T-Bolt Kit (See Detail)	4

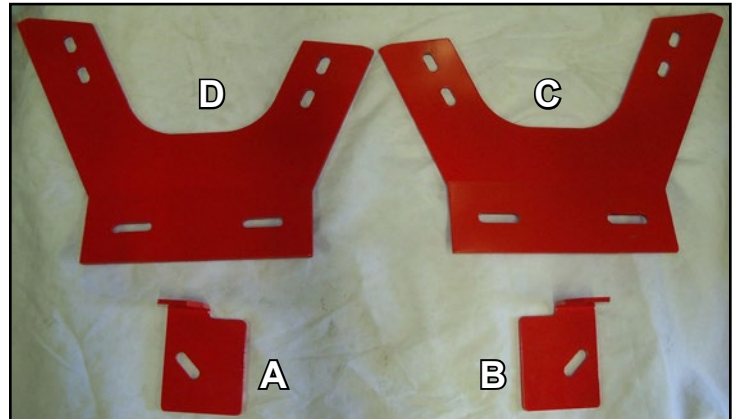

Read instructions and view illustrations before beginning.

Need help with your installation?



sales@superatv.com



www.superatv.com



1-812-574-7777



8:00am - 9:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

*Thank You
For Choosing*

SUPERATV.COM

Liability Statement

SuperATV's products are designed to best fit users ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory, or aftermarket, parts will void any warranty provided by SuperATV and is not recommended. SuperATV's products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV to verify that they will work together.

Although SuperATV has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV products, user agrees that should damages occur, SuperATV will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV will warranty only parts provided by SuperATV. Any damage or problems with OEM housings, bearings, seals, or other manufacturers products will not be covered by SuperATV. SuperATV parts and products are not warrantied if item was not installed properly, misused, or modified.

Passenger Side installation shown.

Do not tighten hardware completely unless noted.

1. Remove Roll Cage Mounting Hardware. Keep for reuse. See Fig. 1.
2. Install Mounting Bracket, Right (A) using stock hardware removed in Step 1. See Fig. 2.
3. Insert (2) T-Bolts (M) into frame. See Fig. 3. Remove and set aside hardware pre-installed on T-Bolts (M).
4. Insert U-Bolt (J) around frame. See Fig. 4.
5. Install Center Bracket (C) to T-Bolts (M). Secure with T-Bolt hardware. See Fig. 5.
6. Attach Nerf Bar (E) to Mounting Bracket (A) with M10 Flanged Head Bolt (L). See Fig. 6.
7. Attach Nerf Bar (E) to U-Bolt (J) with (2) each M8 Flat Washers (G) and M8 Nylock Nuts (H). See Fig. 7.
8. Secure Nerf Bar (E) to Center Bracket (C) using (4) M10 Flanged Head Bolts (L). See Fig. 8.
9. Align to machine and tighten all hardware securely. Repeat steps for opposite side.

